





Wellshow Technology Co., Ltd.

RG-58A/U COAXIAL CABLE

P/N D058A1H5BT



Structure Figure

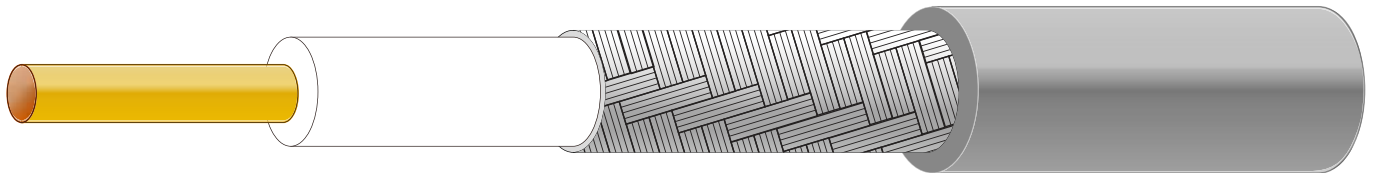

Conductor

Material
Tinned copper wire

Construction
19 / 0.18

Insulation

Material
Low-density polyethylene foam

Diameter
2.95 mm

Single Braid

Material
Tinned copper wire

Construction
16 / 7 / 0.127 mm

Jacket

Material
PVC

Diameter
4.95 ± 0.15 mm

Electrical Properties

Nominal Impedance	50 Ω
Nominal Capacitance	93.5 F/km
Nominal Attenuation 100MHz	174 dB/km

Packing

Standard Put-Up	ft/coil	656
	M/coil	200