
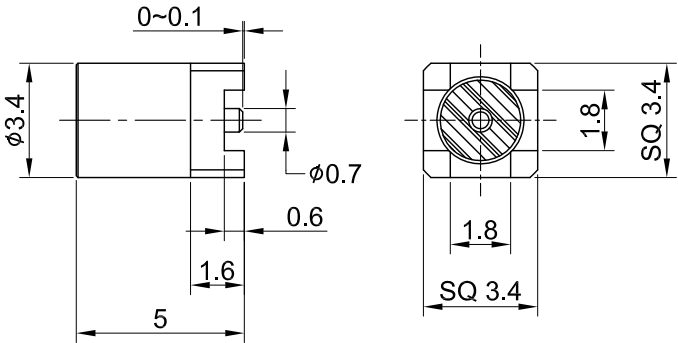



REV	DESCRIPTION	DATE
1.30	NEW DRAWING FRAME	2023/08/01
1.40	CORRECT INSULATION RESISTANCE	2023/11/14



MECHANICAL DATA
DURABILITY : 500 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.3 MAX.
WORKING VOLTAGE : AC 170V
WITHSTANDING VOLTAGE : AC 500V
INSULATION RESISTANCE : 1000 MΩ MIN

03	CENTER PIN	Be.Cu	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE MMCX st jack SMT, leg:0.6mm			
DWG NO. C06AN3FP00711B		 Wellshow	
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES	DRAWN BY: Lottie 2023/11/14
		.X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	CHKD BY: Dora 2023/11/14
SHEET 1 of 1		Unit: mm	 REV.
			DA2311090005 1.40