



REV	DESCRIPTION	DATE
2.00	CHG Strip 1.5/0.9/2.0/0.8 W. 1.5/0.6/2.0/0.5	2014/06/09
2.10	ADD DIM $\phi 0.8/ \phi 2.3$	2024/10/01
2.11	CHG VSWR 1.5 MAX W. 1.35 MAX	2025/04/25



RECOMMENDED
STRIP LENGTHS

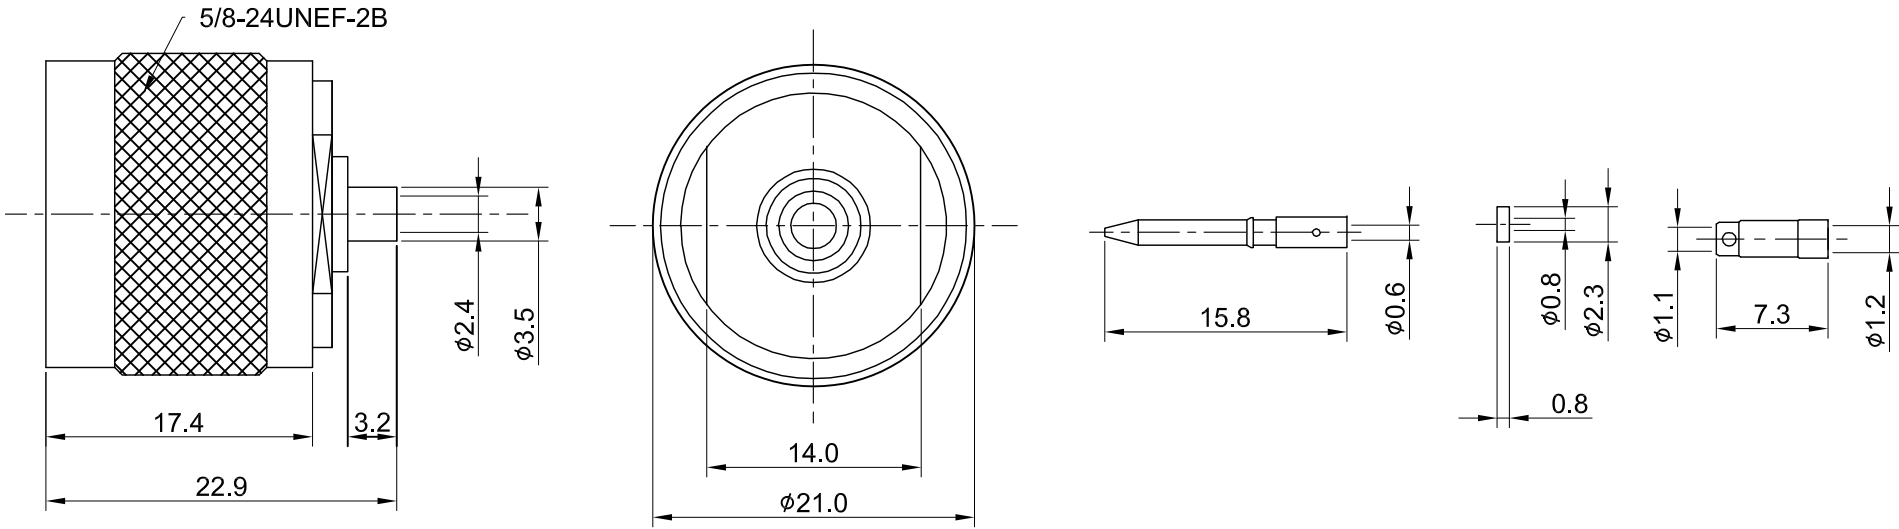

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 1000V
WITHSTANDING VOLTAGE : AC 2500V
INSULATION RESISTANCE : 5000 MΩ MIN

07	C-RING	STAINLESS STEEL	NONE	1
06	FERRULE	BRASS	NICKEL	1
05	SHELL	BRASS	NICKEL	1
04	GASKET	SILICONE RUBBER	NONE	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE			
N(M)st. for 1.13			
DWG NO.		C27CA31113001C	
CUST.		P/N: N/A	
P/N:		N/A	
DWG NO:		N/A	
SHEET		1 of 1	Unit: mm
GENERAL TOLERANCES		DRAWN BY: Oscar 2025/04/25	
.X ±0.2		CHK'D BY: Chilli 2025/04/25	
.XX ±0.2		REV.	
.XXX ±0.2		DA2504230001	
ANGLES N/A		2.11	