



REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2022/12/15
1.10	NEW DRAWING FRAME	2024/02/06
1.11	CHG VSWR 1.5 MAX W. 1.35 MAX	2025/04/25



RECOMMENDED
STRIP LENGTHS

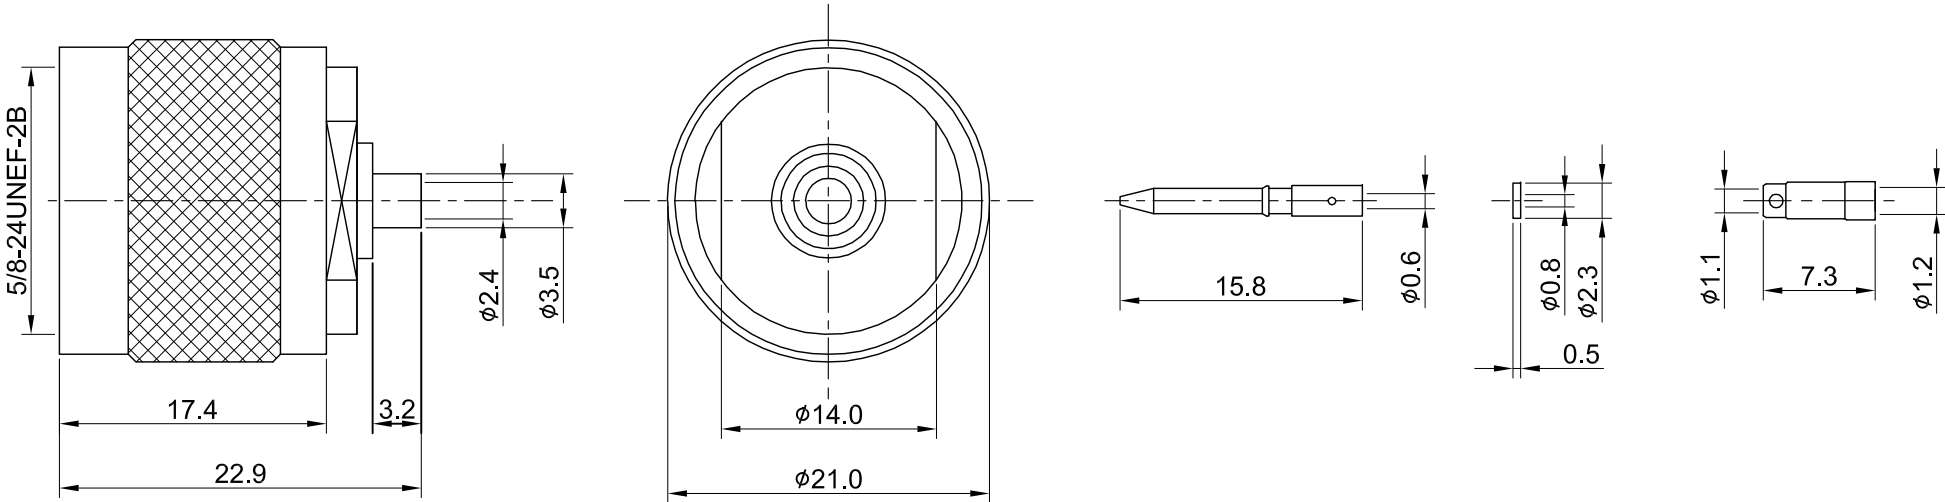

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~10GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 1000V
WITHSTANDING VOLTAGE : AC 2500V
INSULATION RESISTANCE : 5000 MΩ MIN

07	SHELL	BRASS	NICKEL	1
06	FERRULE	BRASS	NICKEL	1
05	C-RING	STAINLESS STEEL	NONE	1
04	GASKET	SILICONE RUBBER	NONE	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE			
N(M) st. for 1.13, 10GHz			
DWG NO. C27CA31113001C-1			
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	DRAWN BY: Oscar 2025/04/25 CHK'D BY: Chilli 2025/04/25
SHEET 1 of 1 Unit: mm			REV. 1.11
		DA2504230002	