



REV	DESCRIPTION	DATE
1.00	INITIAL DESIGN	2022/12/15
1.10	NEW DRAWING FRAME	2024/10/15
1.11	CHG VSWR 1.5 MAX W. 1.35 MAX	2025/04/25

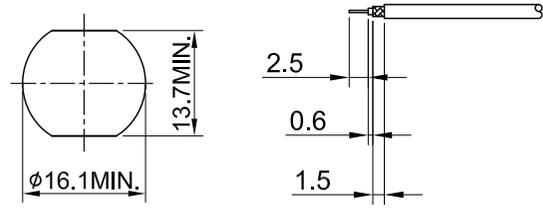

Rec. Mounting Hole
Not for Orientation

RECOMMENDED
STRIP LENGTHS

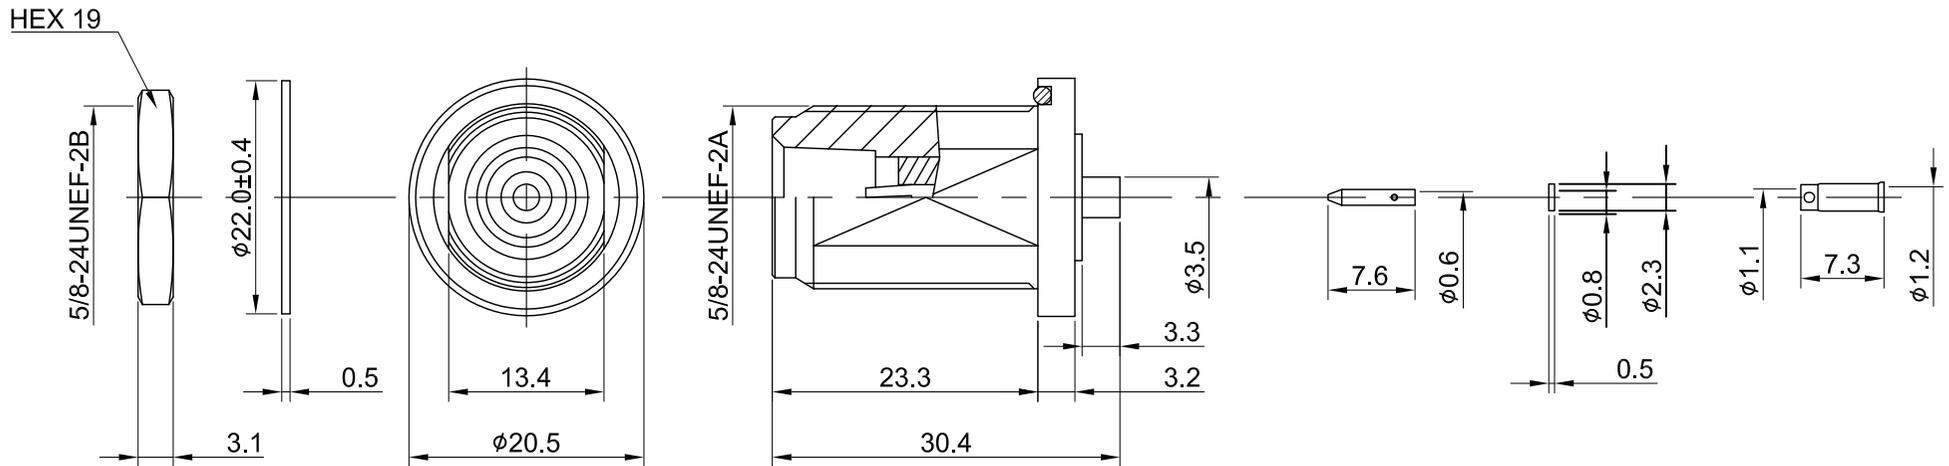

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~10GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 1000V
WITHSTANDING VOLTAGE : AC 2500V
INSULATION RESISTANCE : 5000 MΩ MIN

09	NUT	BRASS	NICKEL	1
08	WASHER	BRASS	NICKEL	1
07	SLEEVE	BRASS	NICKEL	1
06	INSULATOR B	TEFLON	NONE	1
05	CONTACT	BRASS	GOLD	1
04	GASKET	SILICONE RUBBER	BLACK	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		DRAWN BY: Oscar		2025/04/25
N(F) bh. wOring for 1.13, 10GHz		CHK'D BY: Chili		2025/04/25
DWG NO. C28CE31113002F-4		GENERAL TOLERANCES		
CUST. P/N: N/A DWG NO: N/A		.X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A		
SHEET 1 of 1	Unit: mm	DA2504230009		REV. 1.11