



REV	DESCRIPTION	DATE
1.01	CHG DIM $\phi 0.9$ W. $\phi 0.8$, ADD DIM $\phi 2.3$	2014/08/19
1.10	NEW DRAWING FRAME	2024/10/07
1.11	CHG VSWR 1.5 MAX W. 1.35 MAX	2025/04/25

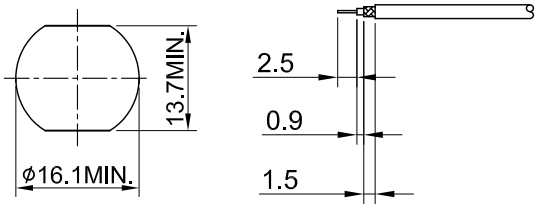

Rec. Mounting Hole
Not for Orientation

RECOMMENDED
STRIP LENGTHS

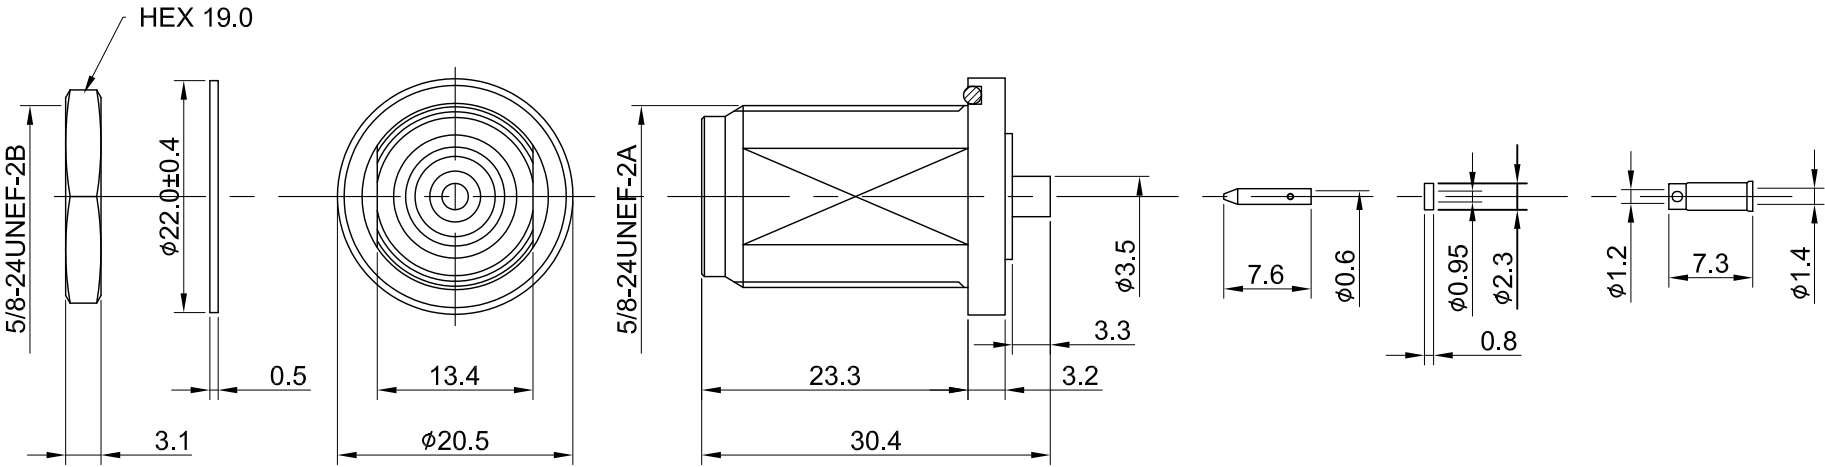

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50 Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 1000V
WITHSTANDING VOLTAGE : AC 2500V
INSULATION RESISTANCE : 5000 M Ω MIN

09	NUT	BRASS	GOLD	1
08	WASHER	BRASS	GOLD	1
07	GASKET	SILICONE RUBBER	BLACK	1
06	SLEEVE	BRASS	NICKEL	1
05	CONTACT	BRASS	GOLD	1
04	INSULATOR B	TEFLON	NONE	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE			N(F) bh. w/Oring for 1.32		
DWG NO.			C28CE31132002F-2		
CUST.			P/N: N/A		
DWG NO:			N/A		
SHEET			1 of 1		
Unit: mm					
GENERAL TOLERANCES			DRAWN BY: Oscar		
.X ± 0.2			CHK'D BY: Chilli		
.XX ± 0.2			2025/04/25		
.XXX ± 0.2			REV.		
ANGLES N/A			DA2504230011		
			1.11		