




REV	DESCRIPTION	DATE
1.02	ADD THREAD AND RECOMMENDED MOUNTING HOLE	2014/08/19
1.10	CORRECT $\phi 0.95$ W. $\phi 0.9$	2024/02/06
1.11	CHG VSWR 1.5 MAX W. 1.35 MAX	2025/04/25



Rec. Mounting Hole  
Not for Orientation



RECOMMENDED  
STRIP LENGTHS

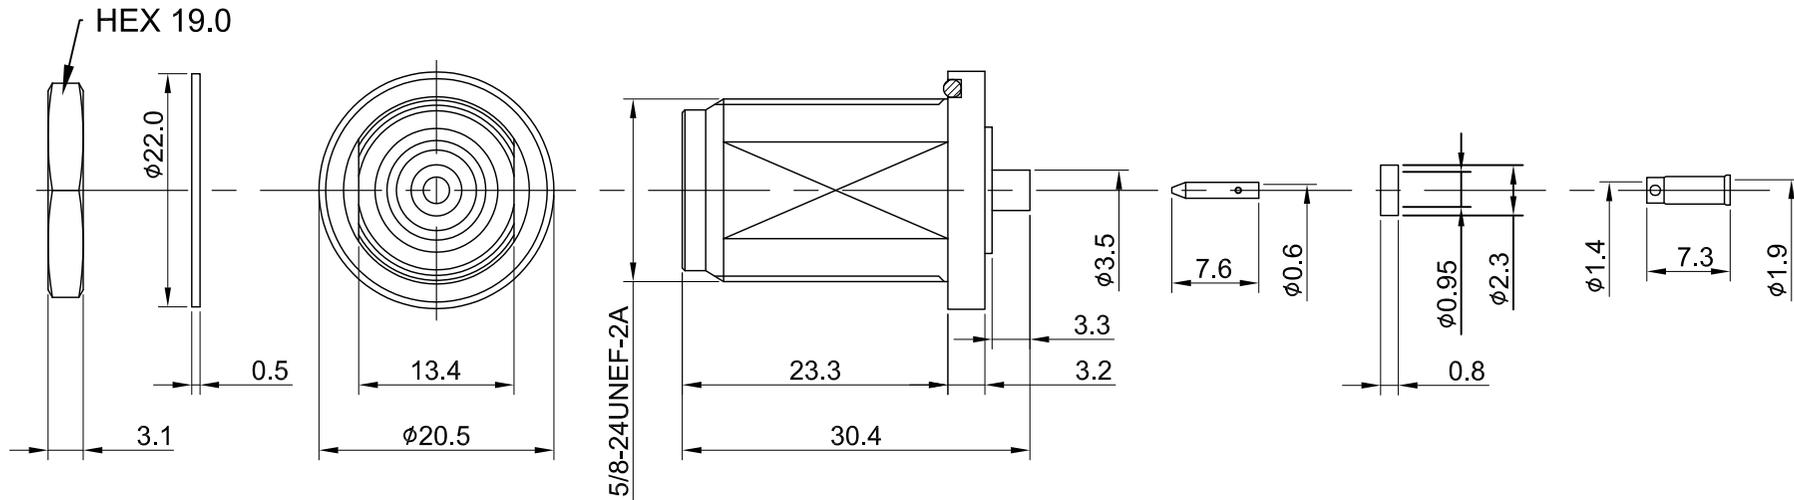

MECHANICAL DATA  
DURABILITY : 100 CYCLES  
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA  
FREQUENCY RANGE: DC~6GHz  
IMPEDANCE : 50Ω  
VSWR : 1.5 MAX.  
WORKING VOLTAGE : AC 1000V  
WITHSTANDING VOLTAGE : AC 2500V  
INSULATION RESISTANCE : 5000 MΩ MIN

09	SLEEVE	BRASS	NICKEL	1
08	INSULATOR B	TEFLON	NONE	1
07	PIN	BRASS	GOLD	1
06	NUT	BRASS	NICKEL	1
05	WASHER	BRASS	NICKEL	1
04	GASKET	SILICONE RUBBER	BLACK	1
03	CENTER PIN	P.Bronze	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE  
N(F) bh. w/Oring for RG178

DWG NO.  
C28CE31178002F-2

CUST.  
P/N: N/A  
DWG NO: N/A

SHEET 1 of 1 Unit: mm



GENERAL TOLERANCES		DRAWN BY: Oscar 2025/04/25	
.X	±0.2		REV. 1.11
.XX	±0.2		
.XXX	±0.2		
ANGLES	N/A	DA2504230019	