


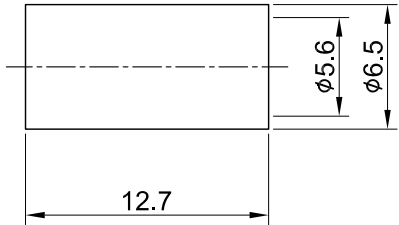


REV	DESCRIPTION	DATE
1.10	CHG BARREL ID Ø3.2 W. Ø3.1, UPDATE GENERAL TOLERANCE ±0.1	2018/06/06
1.20	UPDATE RECOMMENDED STRIP LENGTHS	2024/01/05




▲ RECOMMENDED
STRIP LENGTHS

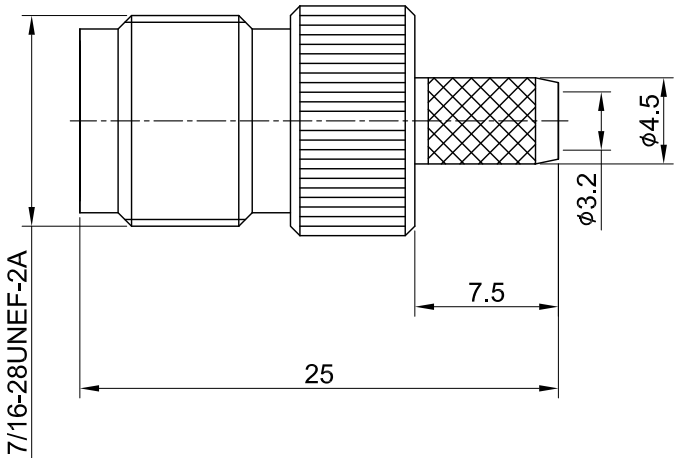

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~3GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

05	FERRULE	BRASS	NICKEL	1
04	PRESS WASHER	BRASS	NICKEL	1
03	INSULATOR	TEFLON	NONE	1
02	CENTER PIN	P.BRONZE	GOLD	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE TNC(F) st. crimp for LMR200			
DWG NO. C18CA3FL20008B		Wellshow	
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES .X±0.2 .XX±0.2 .XXX±0.2 ANGLESN/A	DRAWN BY: Kelly2024/01/05
SHEET1 of 1Unit: mm			CHK'D BY: Eileen2024/01/05
			 REV. 1.20
		DA2401050017	