


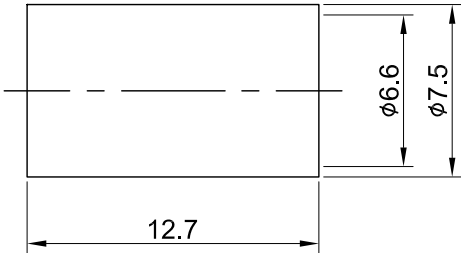


REV	DESCRIPTION	DATE
2.01	UPDATE RECOMMENDED STRIP LENGTH	2023/02/23
2.10	NEW DRAWING FRAME	2024/05/07

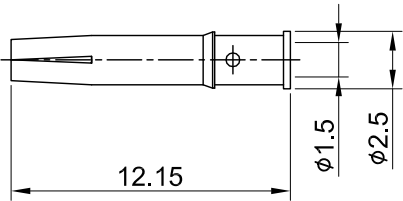

RECOMMENDED
STRIP LENGTHS

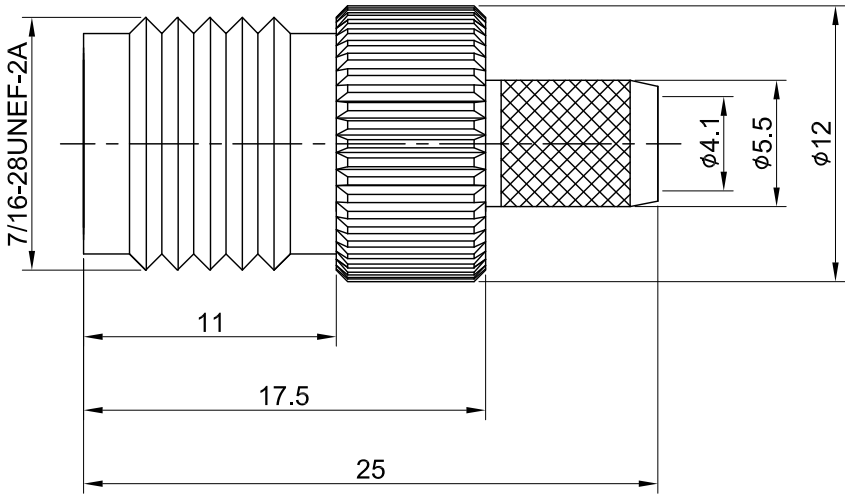

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

05	PRESS WASHER	BRASS	NICKEL	1
04	FERRULE	BRASS	NICKEL	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE TNC(F) st. crimp for LMR240			
DWG NO. C18CA3FL24008A			
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	DRAWN BY: Kelly 2024/05/07 CHK'D BY: Kana 2024/05/07
SHEET 1 of 1 Unit: mm			REV. 2.10
		DA2405060016	