




REV	DESCRIPTION	DATE
1.02	CORRECT WASHER STEEL W. BRASS	2023/01/11
1.10	NEW DRAWING FRAME	2023/12/21
1.20	CHG WASHER BRASS W. STEEL	2024/05/14




DETAIL A



RECOMMENDED
MOUNTING HOLE




RECOMMENDED
STRIP LENGTHS

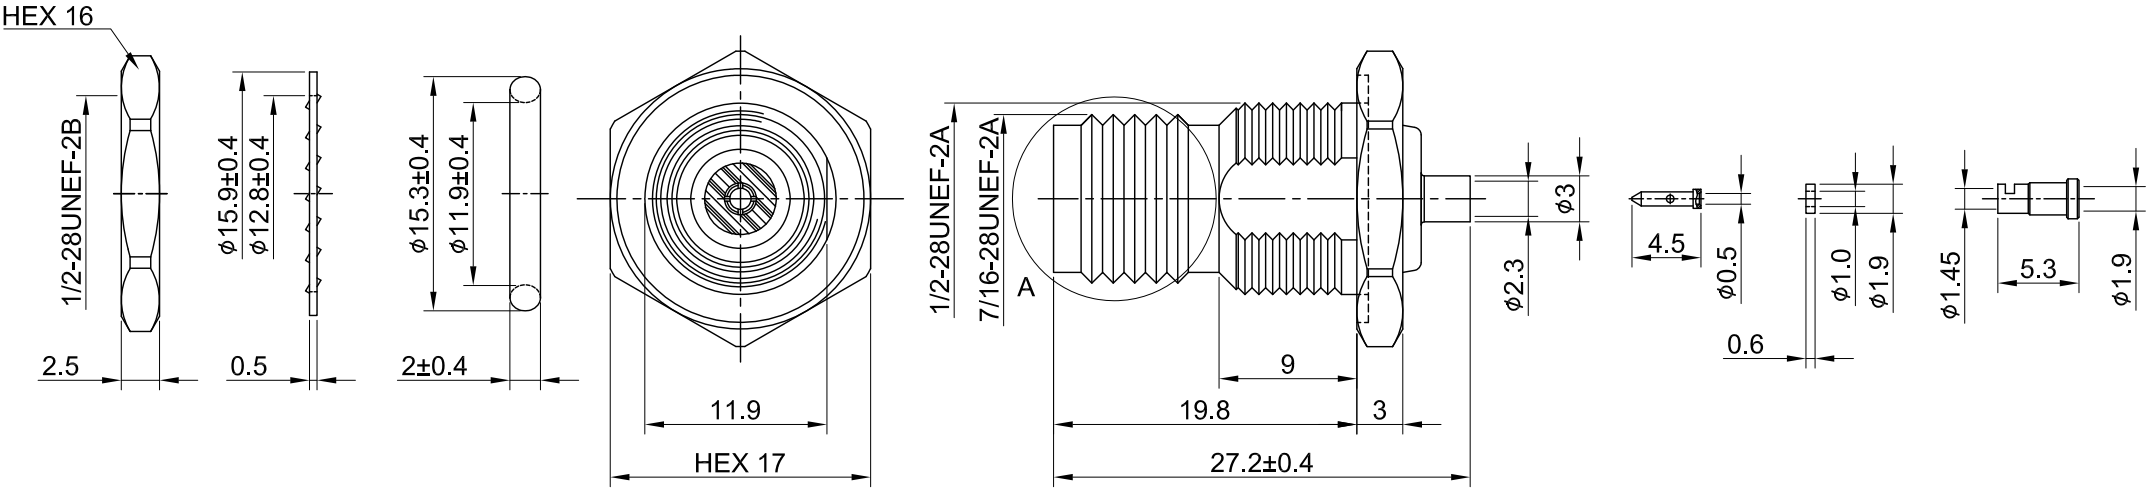

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1000V
INSULATION RESISTANCE : 5000 MΩ MIN

10	NUT	BRASS	NICKEL	1
09	LOCK WASHER	BRASS	NICKEL	1
08	O RING	SILICONE RUBBER	BLACK	1
07	FERRULE	BRASS	GOLD	1
06	INSULATOR GASKET	TEFLON	NONE	1
05	CHASSIS	BRASS	NICKEL	1
04	BULLET CONTACT	BRASS	GOLD	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE				TNC(F)st.bh. wOring, crimp for RG178			
DWG NO. C18CD3F178003H					Wellshow		
CUST. P/N: N/A DWG NO: N/A			GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A		DRAWN BY: Kelly 2024/05/14		
					CHK'D BY: Eileen 2024/05/14		
SHEET 1 of 1			Unit: mm				
					REV.		
					DA2405140014 1.20		