
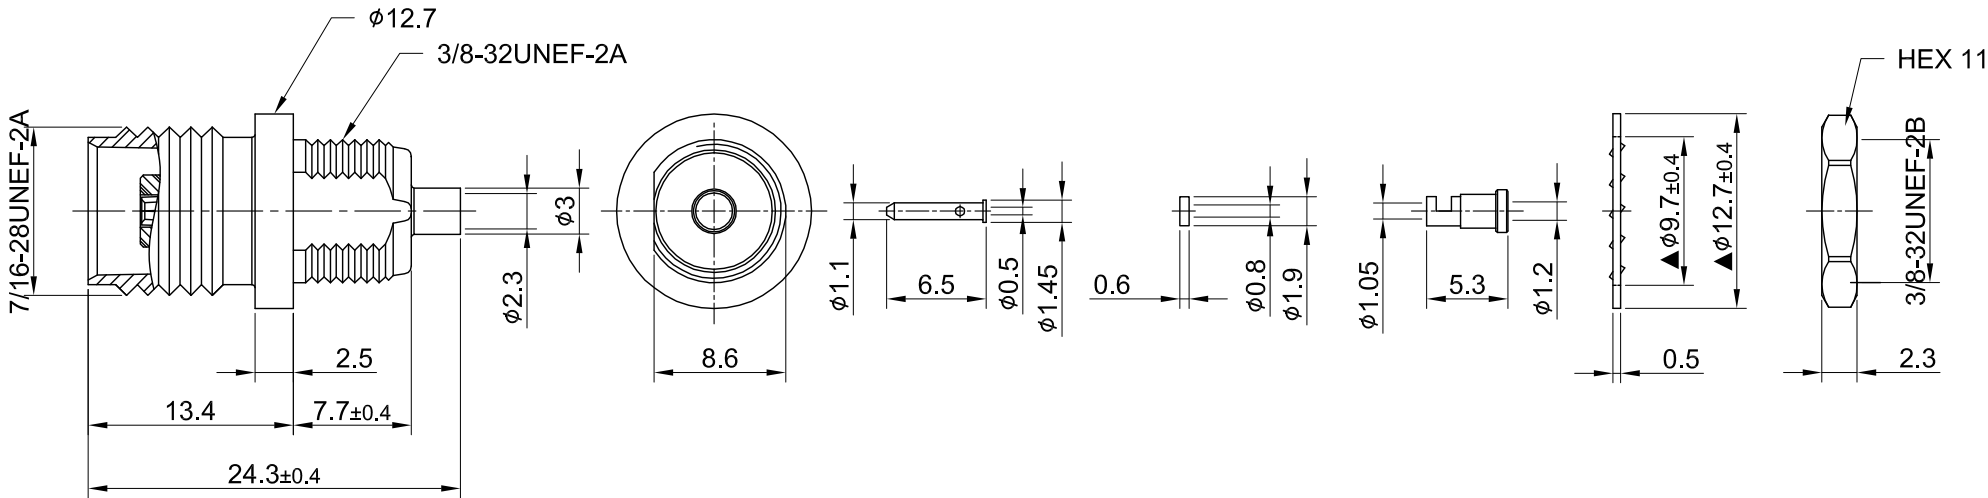


REV	DESCRIPTION	DATE
1.20	NEW DRAWING FRAME	2023/07/17
1.21	CORRECT INSULATION RESISTANCE UNIT	2024/03/05
1.30	CHG 8.8/ ϕ 9.7/ ϕ 12.6 W. 9/ ϕ 9.6/ ϕ 12.6, CHG WASHER MATERIAL BRASS W. STEEL	2025/01/14

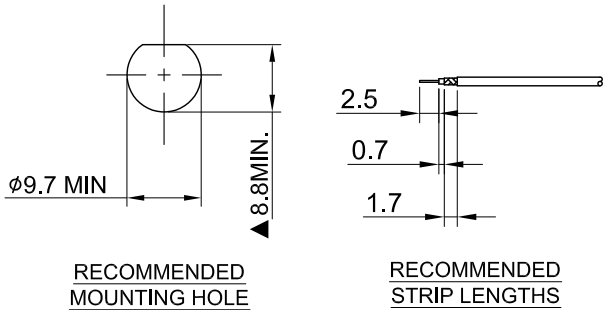

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ +165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~ 6GHz
IMPEDANCE : 50 Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 M Ω MIN

11	NUT	BRASS	NICKEL	1
10	LOCK WASHER	BRASS	NICKEL	1
09	FERRULE	BRASS	GOLD	1
08	INSULATOR GASKET	TEFLON	NONE	1
07	BULLET CONTACT	BRASS	GOLD	1
06	BODY B	BRASS	NICKEL	1
05	CENTER CONTACT	Be.Cu	GOLD	1
04	INSULATOR B	TEFLON	NONE	1
03	PIN	P.BRONZE	GOLD	1
02	INSULATOR A	TEFLON	NONE	1
01	BODY A	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE		TNC(F)st.bh.front mount crimp for 1.13, pin in pin (6GHz)	
DWG NO.		C18CK3F113005A	
CUST.		P/N: N/A DWG NO: N/A	
SHEET		1 of 1	Unit: mm
GENERAL TOLERANCES		DRAWN BY: Kelly 2025/01/14 CHK'D BY: Chilli 2025/01/14	
.X ± 0.2 .XX ± 0.2 .XXX ± 0.2 ANGLES N/A		REV. 1.30	