


REV	DESCRIPTION	DATE
1.10	ADD 2.1 GHz & 2170 MHz	2013/07/30
1.20	NEW DRAWING FRAME	2024/02/05

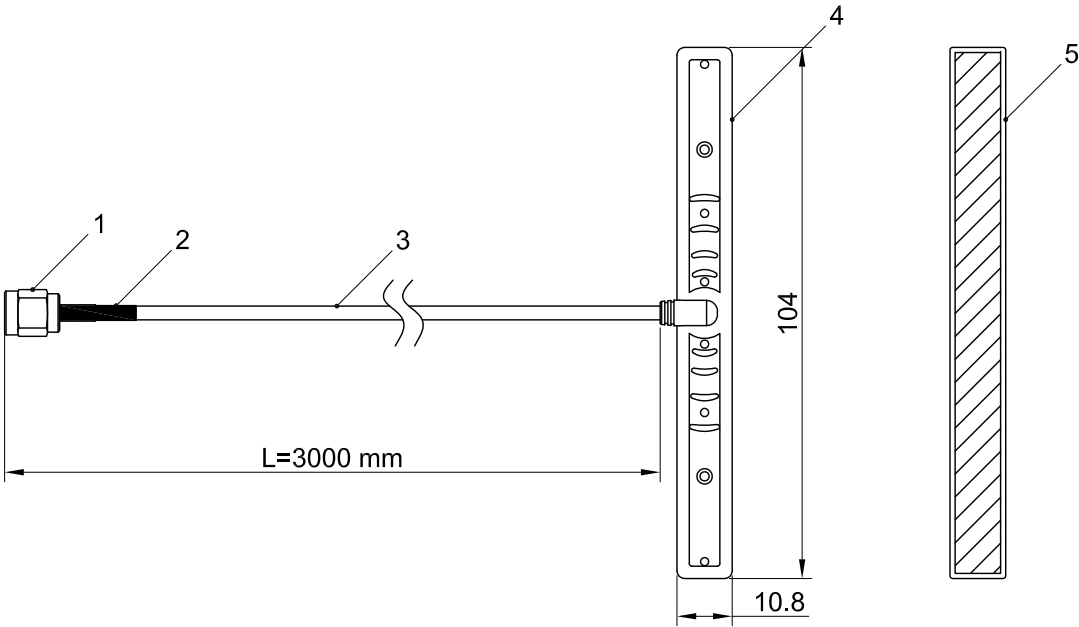

MECHANICAL DATA

1. THE ORIENTATION IS FOR REFERENCE ONLY.
(圖面組裝方向性僅供參考)

2. ASSEMBLY ACCORDING TO IPC/WHMA-A-620.

3. TEMPERATURE RANGE : -20°C ~ 80°C

ELECTRICAL DATA


1. 100% CONTINUITY, SHORT CIRCUIT TEST.

2. IMPEDANCE : 50Ω

3. VSWR : 850~960 MHz :2.0 MAX.
1710~2170 MHz :2.0 MAX.

NOTE

1. PACKING : COLING PER PIECE. (單條繞線)

				TITLE GSM T Bar quad band +2.1G + 2170MHz antenna with 3M RG174 and SMA(M) st. Gold							
05	3M Sticker	1	W0Y008RAG001	DWG NO. N/A P/N AG001WSG08005		 Wellshow		GENERAL TOLERANCES CONN. STRIP ANGLES ±0.2 ±0.3 N/A		DRAWN BY: Kelly 2024/02/05	
04	T Bar Antenna	1	AG001WSG08014							CHK'D BY: Eileen 2024/02/05	
03	RG174 coaxial cable (Black)	1		CUST. P/N: N/A DWG NO: N/A				REV. 1.20			
02	Heatshrink (Black)	1	Y0E01XX-035-B								
01	SMA Straight Plug	1	C01AA31174004A								
NO	DESCRIPTION	Q'TY	ITEM	SHEET 1 of 1	Unit: mm						