


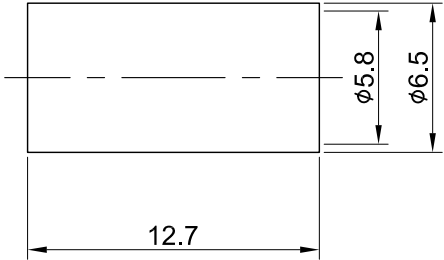


REV	DESCRIPTION	DATE
2.00	UPDATE RECOMMENDED CABLE STRIPPING DIM, GASKET MATERIAL	2021/08/18
2.10	NEW DRAWING FRAME	2024/04/02

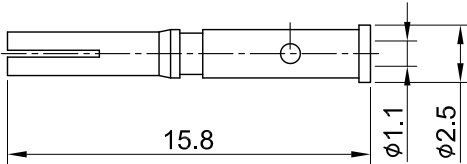

RECOMMENDED STRIP LENGTHS

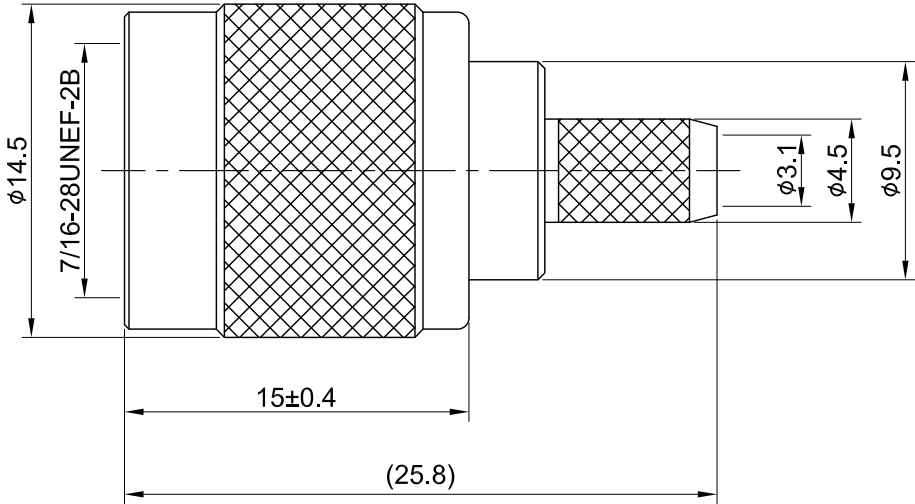

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~1GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

08	FERRULE	BRASS	NICKEL	1	TITLE RPTNC(M) st. crimp type for RG142/RG400				
07	CENTER PIN	P.BRONZE	GOLD	1					
06	BODY	BRASS	NICKEL	1					
05	INSULATOR	TEFLON	NONE	1	DWG NO. C25CA3F400002-1		 Wellshow		
04	WASHER	BRASS	NICKEL	1					
03	INNER RETAINING RING	BRASS	NICKEL	1	CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES .X .XX .XXX ANGLES ±0.2 ±0.2 ±0.2 N/A	DRAWN BY: Kelly 2024/04/02	
02	GASKET	SILICONE RUBBER	RED	1				CHK'D BY: Dora 2024/04/02	
01	SHELL	BRASS	NICKEL	1				 REV.	
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	SHEET 1 of 1	Unit: mm	DA2403260010		2.10