





REV	DESCRIPTION	DATE
1.20	CHG DIM (25.8)/15±0.4 w.25.8/15	2018/09/13
2.00	UPDATE DRAWING	2025/03/13

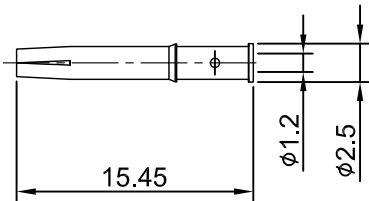

RECOMMENDED
STRIP LENGTHS

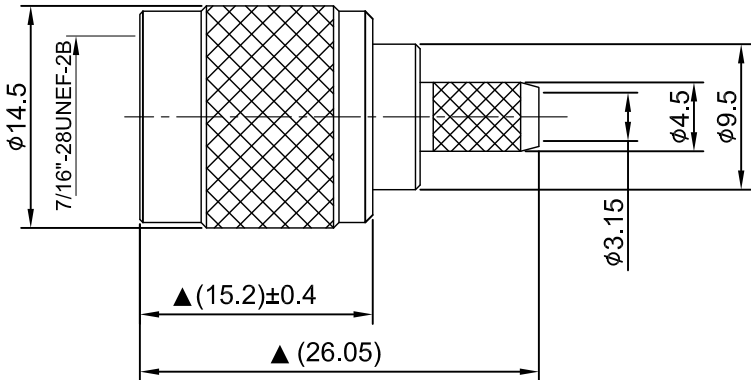

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

07	FERRULE	BRASS	NICKEL	1
06	PIN	P.BRONZE	GOLD	1
05	BODY	BRASS	NICKEL	1
04	INNER RETAINING RING	BRASS	NONE	1
03	GASKET	SLICONE RUBBER	RED	1
02	INSULATOR	TEFLON	NONE	1
01	SHELL	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE			
RP TNC(M) st. crimp for CFD200			
DWG NO. C25CA3FL20002			
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES .X ±0.1 .XX ±0.1 .XXX ±0.1 ANGLES N/A	DRAWN BY: Oscar 2025/03/13 CHK'D BY: Chilli 2025/03/13 REV. 2.00
SHEET 1 of 1	Unit: mm	DA2503120006	