


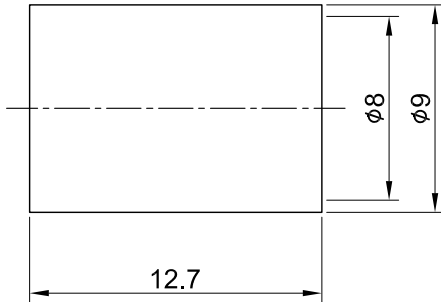


REV	DESCRIPTION	DATE
2.00	CHG INTERFACE, ADD DIM $\phi 12$, CHG PIN L.13.2 W. 12.7	2017/06/05
2.10	NEW DRAWING FRAME	2024/04/09

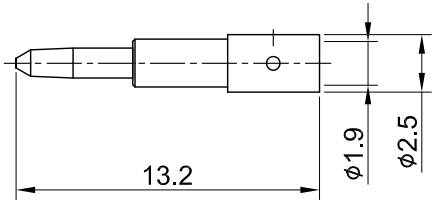

RECOMMENDED
STRIP LENGTHS

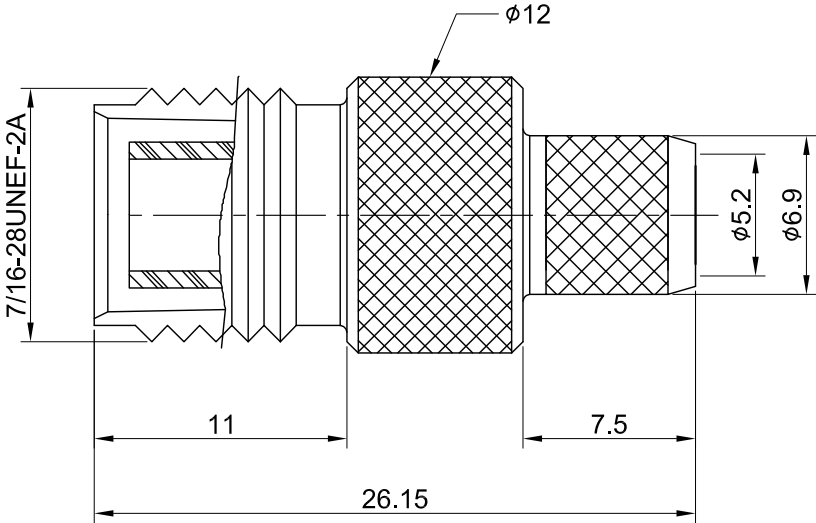

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

05	PRESS WASHER	BRASS	NICKEL	1
04	FERRULE	BRASS	NICKEL	1
03	CENTER PIN	BRASS	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE RPTNC(F) st. crimp type for LMR300, Nickel			
DWG NO. C26CA3FL30008B			
CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES .X ±0.2 .XX ±0.2 .XXX ±0.2 ANGLES N/A	
SHEET 1 of 1		DRAWN BY: Kelly 2024/04/09 CHK'D BY: Dora 2024/04/09 REV. 2.10	
Unit: mm		DA2403260013	