




REV	DESCRIPTION	DATE
1.40	NEW DRAWING FRAME	2024/04/09
1.41	CHG WASHER MATERIAL BRASS	2024/08/12
1.50	CHG DRAWING O-RING TRENCH DEPTH	2025/03/07



RECOMMENDED
MOUNTING HOLE



RECOMMENDED
STRIP LENGTHS

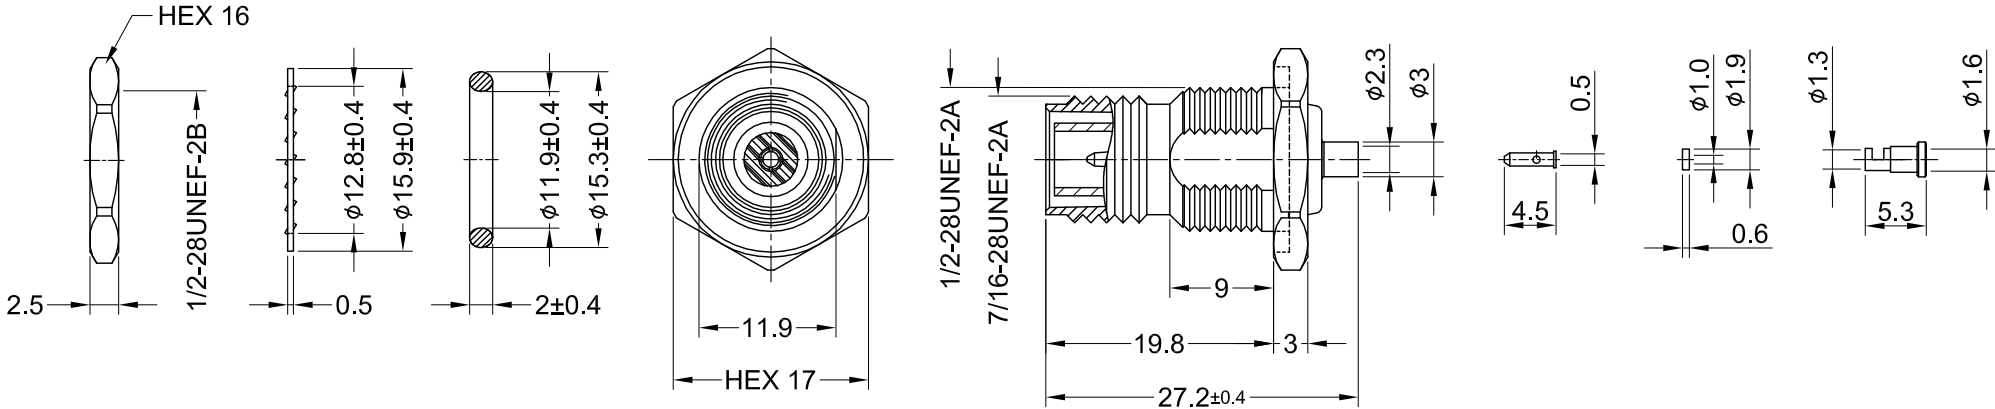

MECHANICAL DATA
TEMPERATURE RANGE : -65°C ~ + 165°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~6GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WORKING VOLTAGE : AC 500V
WITHSTANDING VOLTAGE : AC 1500V
INSULATION RESISTANCE : 5000 MΩ MIN

10	NUT	BRASS	NICKEL	1
09	LOCK WASHER	BRASS	NICKEL	1
08	O RING	SILICONE RUBBER	BLACK	1
07	GASKET	TEFLON	NONE	1
06	FERRULE	BRASS	GOLD	1
05	BULLET CONTACT	BRASS	GOLD	1
04	CHASSIS	BRASS	NICKEL	1
03	CENTER PIN	P.BRONZE	GOLD	1
02	INSULATOR	TEFLON	NONE	1
01	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY

TITLE			RPTNC(F)st.bh.w/o-ring crimp for 1.37 cable		
DWG NO.			C26CD3F137003H		
CUST.			P/N: N/A		
DWG NO:			N/A		
SHEET			1 of 1	Unit: mm	
GENERAL TOLERANCES			.X ±0.2	DRAWN BY: Oscar 2025/03/07	
			.XX ±0.2	CHK'D BY: Una 2025/03/07	
			.XXX ±0.2	REV.	
ANGLES N/A			DA2503040014		1.50