



REV	DESCRIPTION	DATE
1.10	CHG DIM $\phi 4.6/\phi 5.40/\phi 6.40/12.70$ w. $\phi 4.5/\phi 5.5/\phi 6.5/12.8$, UPDATE TITLE	2017/01/19
1.20	MODIFY CENTER PIN DESIGN	2024/03/01




RECOMMENDED
STRIP LENGTHS

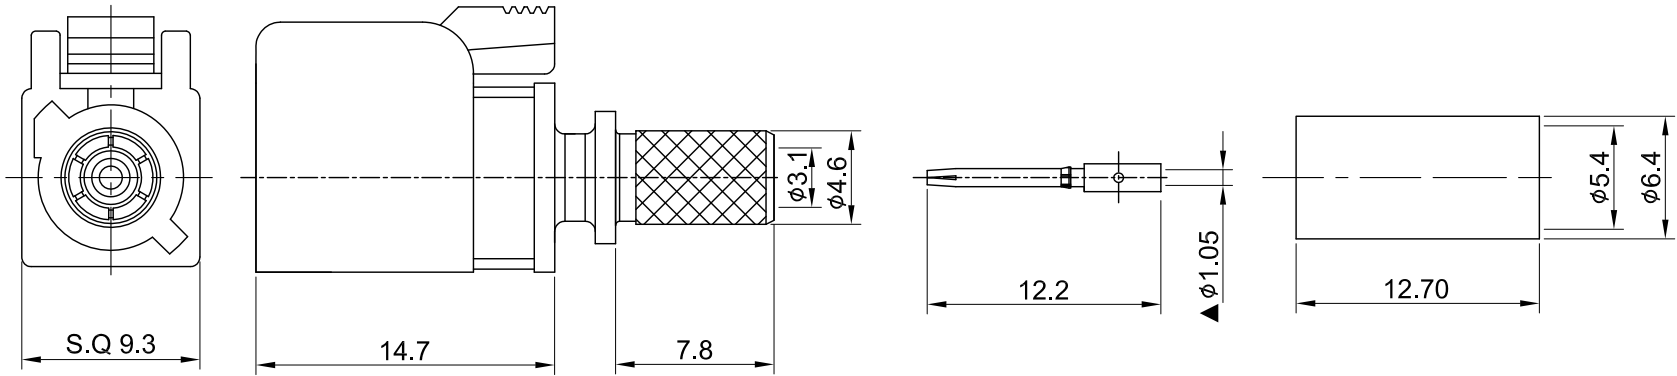

MECHANICAL DATA
DURABILITY : 100 CYCLES
TEMPERATURE RANGE : -40°C ~ + 100°C

ELECTRICAL DATA
FREQUENCY RANGE: DC~4GHz
IMPEDANCE : 50Ω
VSWR : 1.5 MAX.
WITHSTANDING VOLTAGE : AC 750V
INSULATION RESISTANCE : 1000 MΩ MIN

09	C-RING	SK-5	NICKEL	1	TITLE Fakra(F)st. crimp type for RG58/RF195, I code (Beige)					
08	SLEEVE	BRASS	NICKEL	1						
07	GASKET	SILICONE RUBBER	NONE	1						
06	HOUSING	NYLON	BEIGE	1						
05	LOCK RING	NYLON	BEIGE	1	DWG NO. C54CA33058A03I-1					
04	O-RING	SILICONE RUBBER	NONE	1						
03	CENTER PIN	P.BRONZE	GOLD	1	CUST. P/N: N/A DWG NO: N/A		GENERAL TOLERANCES X ±0.2 XX ±0.2 XXX ±0.2 ANGLES N/A		DRAWN BY: Kelly 2024/03/01	
02	INSULATOR	TEFLON	NONE	1					CHK'D BY: Eileen 2024/03/01	
01	BODY	BRASS	NICKEL	1					REV.	
NO	DESCRIPTION	MATERIAL	FINISH	Q'TY	SHEET 1 of 1	Unit: mm			DA2403010002	1.20