
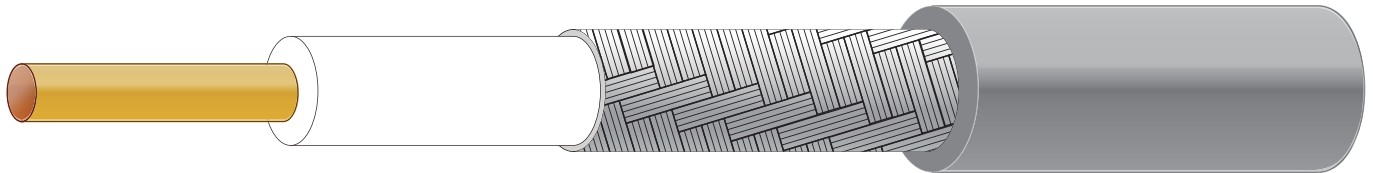


RG-213/U Coaxial Cable

Product No. D21301G5BB

Structure Figure



Conductor

 Material
Strand Bare Copper Wire

 Construction
7 / 0.752 mm

 Diameter
2.3 mm

Insulation

 Material
Solid Polyethylene

 Thickness
2.45 mm

 Diameter
7.24 ± 0.10 mm

Braid Shield

 Material
Bare Copper

 Construction
24 / 8 / 0.18 mm

 Coverage
96 %

 Diameter
0.18 ± 0.008 mm

Jacket

 Material
NC-PVC

 Color
Black

 Diameter
10.3 ± 0.15 mm

Electrical Characteristics

Description	Specification
Impedance	50 ± 3 Ω
Insulation Resistance	Min. 1000 MΩ/km
Capacitance	98 ± 3 pF/m

Attenuation

Attenuation	100 MHz	200 MHz	400 MHz	700 MHz	900 MHz
dB/100m	6.2	8.9	13.4	21.4	25.0
dB/100ft	1.89	2.71	4.08	6.52	7.62